

- Formed Aluminum Housing
- Square Backplate
- 2600 Initial Lumens, 20 Watts
- 130 Lumens per Watt
- 220V Line Voltage
- Dimmable with Standard ELV Controls
- Micro Prismatic Lens Standard
- Powder Coat Finish Options:
 - Black
 - White
 - Copper
 - Titanium
 - Oil Rubbed Bronze
 - Custom finishes are available
- Recommended Mounting Box: 4" Octagonal
- UL and CUL Listed Damp Location


ACCESSORIES

- A complete line of optional accessories are available
- Saw Tooth Diffuser used to minimize filament striation
 - Frosted Micro Prismatic Lens
 - Swivel Knuckle Kit for 17° adjustment (up or down)

PROJECT

TYPE

CATALOG#

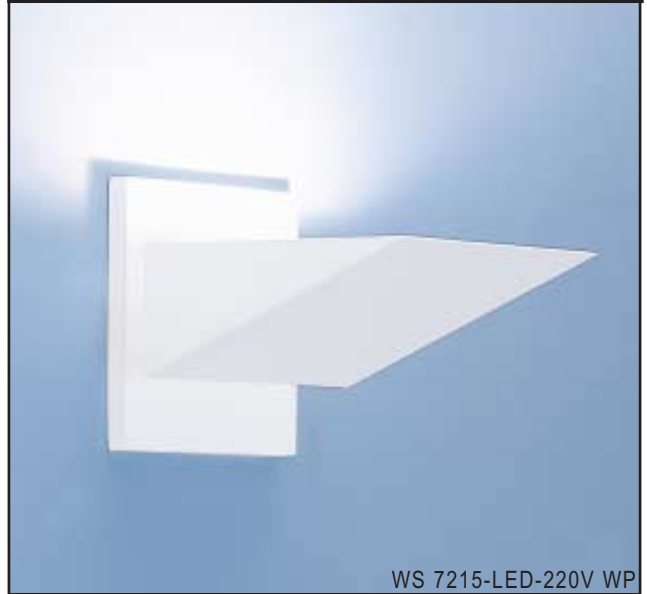

WS 7215-LED-220V WP



BLACK WHITE COPPER TITANIUM OIL RUBBED BRONZE

ALSO AVAILABLE IN
CC CUSTOM COLOR

Ordering Format *choose one from each category*

SERIES	KELVIN	CRI	FINISH	OPTIONAL ACCESSORIES
WS 7215-LED-220V The LED 220 Volt Wedge Lens™	<input type="checkbox"/> 27 2700K	<input type="checkbox"/> 90 90+	<input type="checkbox"/> WP White Powder Coat	ADJUSTMENT
	<input type="checkbox"/> 30 3000K		<input type="checkbox"/> BP Black Powder Coat	<input type="checkbox"/> SK Swivel Knuckle <i>allows for 17° adjustment (up or down)</i>
	<input type="checkbox"/> 35 3500K		<input type="checkbox"/> CP Copper Powder Coat	SHIELDING
			<input type="checkbox"/> TP Titanium Powder Coat	<input type="checkbox"/> MPL5FR Micro Prismatic Lens Frosted <i>(Micro Prismatic Lens Standard)</i>
			<input type="checkbox"/> OB Oil Rubbed Bronze	<input type="checkbox"/> SDL5 Saw Tooth Diffuser
			<input type="checkbox"/> CC Custom Color	

