BELFER LIGHTING


TOOLS FOR THE LIGHTING PROFESSIONAL

WS 6215-LED-Z10 The LED Wedge™

WEDGE™ LED INSTALLATION INSTRUCTIONS

READ ALL INSTRUCTIONS CAREFULLY

CAUTION: DISCONNECT POWER SUPPLY BEFORE INSTALLATION

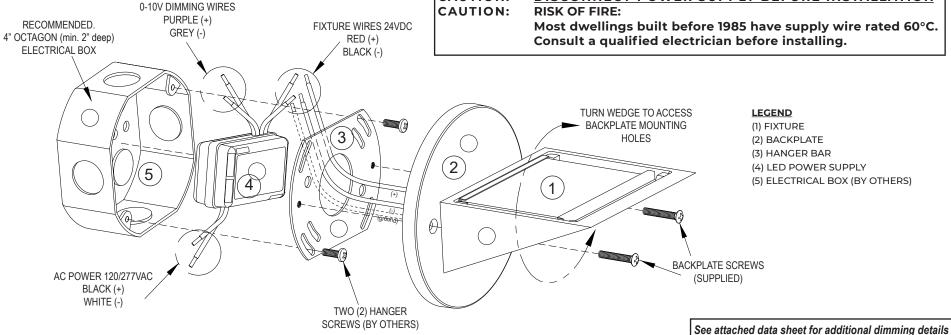

FIXTURE INSTALLATION

THIS PRODUCT MUST BE INSTALLED IN ACCORDANCE WITH THE APPLICABLE INSTALLATION CODE BY A PERSON FAMILIAR WITH THE CONSTRUCTION AND OPERATION OF THIS PRODUCT AND THE HAZARDS INVOLVED.

STEP 1: TURN OFF THE POWER SUPPLY TO THE ELECTRICAL BOX

Recommended 4" octagonal electrical box, 2" min deep (#4)

STEP 2: WIRE LED POWER SUPPLY

- Wire main AC power (120/277VAC) to LED Power Supply (#4). White (-), Black (+), Green (Ground) FOR NON DIMMING
 - Cap the Purple and Gray wires. These wires may be shortened.

FOR DIMMING

This fixture is compatible with 0-10V DC dimmer switches ONLY.

The dimmer switch wires must be in place or installed and routed into the electrical box.

- Connect the Purple (+) and Gray (-) wires to the dimming switch's Purple (+) and Gray (-) wires.
- Insert the LED Power Supply (#4) into the electrical box (#5)

STEP 3: INSTALL THE HANGER BAR

- Pull the Red (+) and Black (-) wires from the LED Power Supply (#4) thru the hanger bar (#3) center hole.
- Attach the hanger bar (#3) to the Electrical Box (#5) with the two (2) screws that come with the electrical box (supplied by others).

STEP 4: WIRE THE LED FIXTURE

- Connect the Red (+) and Black (-) wires from the LED power supply (#4) to the Red (+) and Black (-) fixture wires.
- "Tuck" the wires thru the hanger bar (#3) center hole into the electrical box.

STEP 5: INSTALL THE FIXTURE

The Wedge Fixture can be turned to access the mounting holes.

- Grasp the backplate (#2), then turn the Fixture (#1)
- Install with the supplied screws, then turn the Fixture (#1) back to the horizontal position.

STEP 6: TURN THE POWER ON

PO BOX 2079, OCEAN NJ 07712 (732)493-2666 SALES@BELFER.COM