


WS 6230-LED-ELV-1 The LED Varial™

VARIAL™ LED INSTALLATION INSTRUCTIONS

READ ALL INSTRUCTIONS CAREFULLY

CAUTION: **DISCONNECT POWER SUPPLY BEFORE INSTALLATION**
CAUTION: **RISK OF FIRE:**
Most dwellings built before 1985 have supply wire rated 60°C.
Consult a qualified electrician before installing.

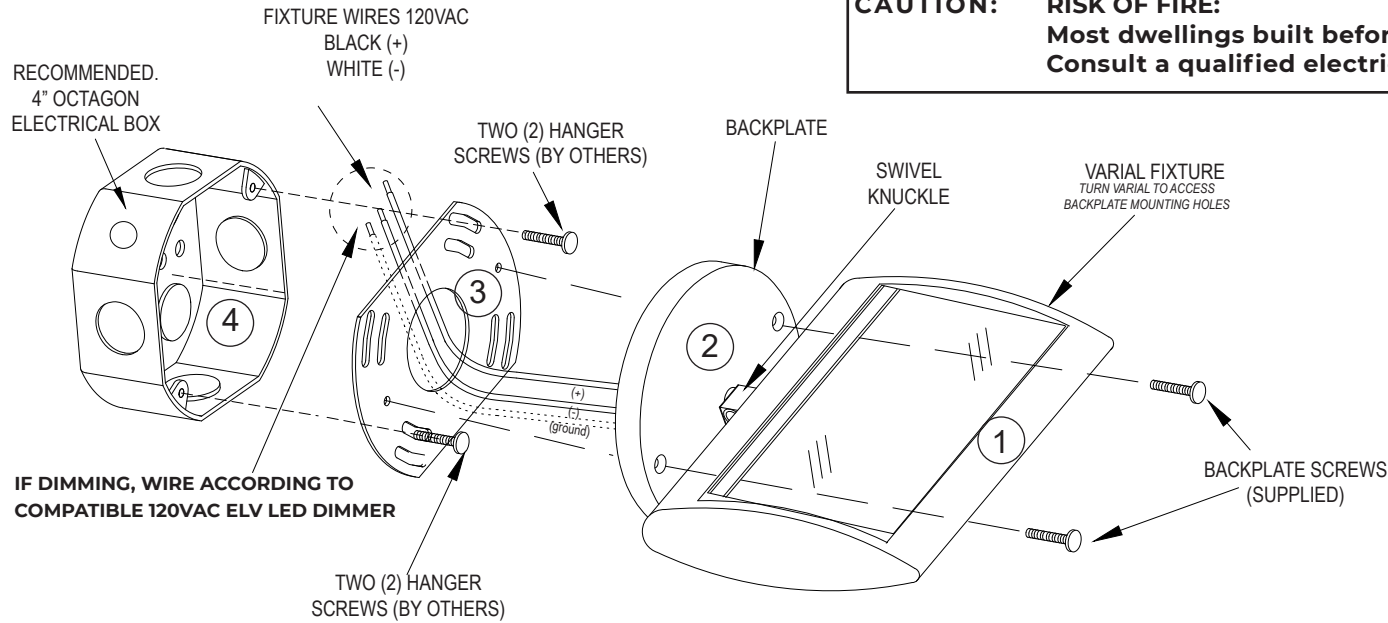

FIXTURE INSTALLATION

THIS PRODUCT MUST BE INSTALLED IN ACCORDANCE WITH THE APPLICABLE INSTALLATION CODE BY A PERSON FAMILIAR WITH THE CONSTRUCTION AND OPERATION OF THIS PRODUCT AND THE HAZARDS INVOLVED.

STEP 1: TURN OFF THE POWER SUPPLY TO THE ELECTRICAL BOX

Recommended 4" octagonal electrical box, 2" min deep (#4)

STEP 2: INSTALL THE HANGER BAR

- Pull the Black (+) and White (-) wires from the fixture (#1) thru the hanger bar (#3) center hole.
- Attach the hanger bar (#3) to the Electrical Box (#4) with the two (2) screws that come with the electrical box (supplied by others).

STEP 4: WIRE THE LED FIXTURE

FOR NON DIMMING

- Wire main AC power (120VAC) to the Black (+) and White (-) wires from the fixture (#1).

FOR DIMMING

This fixture is compatible with ELV LED dimmer switches ONLY.

The dimmer switch wires must be in place or installed and routed into the electrical box.

- Wire according to compatible 120VAC ELV LED dimmer.
- "Tuck" the wires thru the hanger bar (#3) center hole into the electrical box.

STEP 5: INSTALL THE FIXTURE

The Varial Fixture can be turned to access the mounting holes.

- Grasp the backplate (#2), then turn the Fixture (#1)
- Install with the supplied screws, then turn the Fixture (#1) back to the horizontal position.

STEP 6: TURN THE POWER ON