


WS 7230-HAL
The Double Wedge Lens™

DOUBLE WEDGE LENS™
INSTALLATION INSTRUCTIONS

READ ALL INSTRUCTIONS CAREFULLY

CAUTION: DISCONNECT POWER SUPPLY BEFORE INSTALLATION
CAUTION: DISCONNECT POWER SUPPLY BEFORE RELAMPING
CAUTION: RISK OF FIRE:
 Most dwellings built before 1985 have supply wire rated 60°C.
 Consult a qualified electrician before installing.

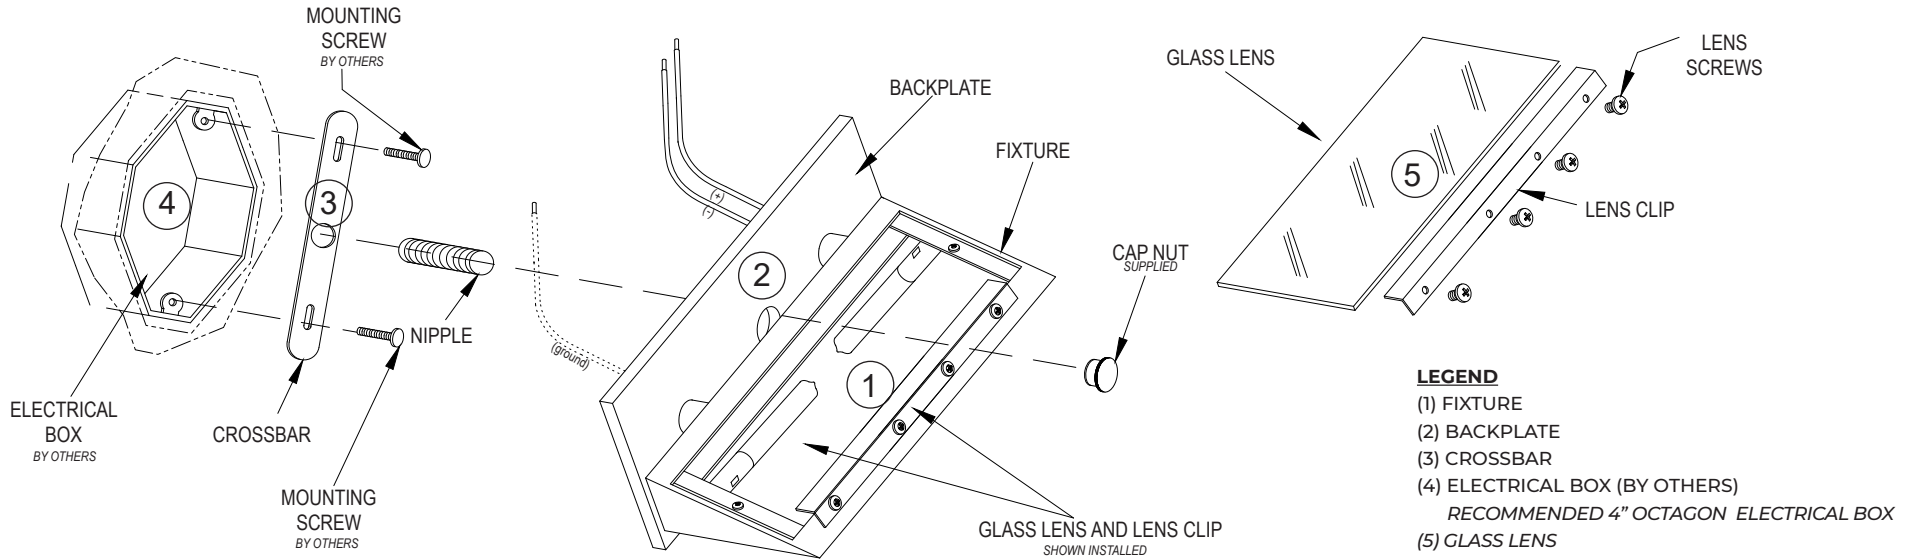

FIXTURE INSTALLATION

THIS PRODUCT MUST BE INSTALLED IN ACCORDANCE WITH THE APPLICABLE INSTALLATION CODE BY A PERSON FAMILIAR WITH THE CONSTRUCTION AND OPERATION OF THIS PRODUCT AND THE HAZARDS INVOLVED.

STEP 1: TURN OFF THE POWER SUPPLY TO THE ELECTRICAL BOX

Recommended 4" octagonal electrical box (#4)

STEP 2: MOUNT THE CROSSBAR

- Mount the crossbar (#3) to the electrical box (#4) with the two (2) screws that come with the electrical box (supplied by others).

STEP 3: WIRE THE FIXTURE

- Pull the fixture wires from each socket around the crossbar (#3) to the electrical box (#4) according to code.

- Wire main AC power (120VAC).

STEP 4: MOUNT BACKPLATE

- Mount Fixture (#1) and backplate (#2) to the crossbar with nipple and cap nut as shown (supplied by Belfer).

STEP 5: INSTALL LAMPS

Halogen lamps will smoke from oils on hands. Use glove or cloth to install. Recommended lamp brands are Osram, Ushio, Phillips and GE. Other brands may cause socket failure from heat.

- Install lamps using gloves or cloth by inserting in bi-pin socket and half twisting into place.

STEP 6: INSTALL GLASS LENS AND LENS CLIP

- Install glass lens (and any additional lens accessories) by sliding into the lens bracket. Mount the Lens Clip with provided lens screws.

STEP 7: TURN THE POWER ON

PO BOX 2079, OCEAN NJ 07712

(732)493-2666 SALES@BELFER.COM

COPYRIGHT© BELFER LIGHTING. NO RIGHTS ARE GRANTED FOR REPRODUCTION, DISCLOSURE OR USE.

PROUDLY MADE IN THE USA

030122 ESB